

SEFAR PURETEX®

Protected Performance

Microporous composite membranes for medical and industrial filtration and venting

Product Features

Structure and properties of Sefar composite membranes

Fast and safe processes, robustness when in use, and ease of processing are all requirements that microporous membranes for filtration and venting have to meet.




The patented SEFAR PURETEX® technology is characterized by a high membrane surface-volume ratio. The use of fibers that are just nanometers in diameter literally results in billions of homogeneous pores from endless, non-shedding nanofibers that enable unparalleled flow rates in venting and liquid filtration applications. The membrane is embedded in technical fabrics for protection and stabilization. Depending on the application, the surface can be finished customer specific, so that optimized hydrophilic or hydrophobic and oleophobic properties can be achieved.

- Excellent permeability properties
- Resistant to mechanical stress when in use
- Easy to process
- Conformity with REACH and RoHS

Medical and industrial applications have all sorts of needs and the highest of requirements. Thanks to the modular design of our SEFAR PURETEX® system, we are flexible and offer optimal solutions.

- Please contact us for more information.
- Further details can also be found in the brochure 'SEFAR PURETEX®'.

Locations

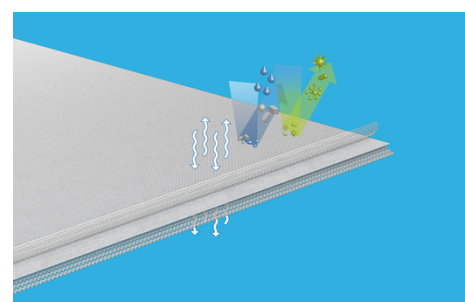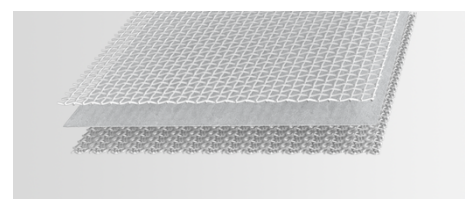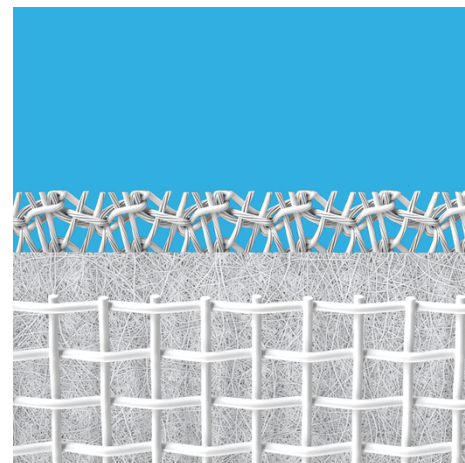

DOWNLOADS

Brochure Sefar Puretex Composite Membrane (PDF 2421 kb)

Sefar Filtration Solutions (SuZhou) Co.,LTD

2 Jingdong Road, Weiting Town,
Suzhou Industrial Park,
Jiangsu Province, P.R.China 215121

电话 +86 512 6283 6383
传真 +86 512-62836380

info.cn@sefar.com

转至产品页



Sefar Filtration Solutions (SuZhou)

2 Jingdong Road, Weiting Town,
Suzhou Industrial Park,
Jiangsu Province, P.R. China
215121
Phone: +86 512 6283 6383
Fax: +86 512-62836380

■ E-Mail



Sefar Trading (Shenzhen) Co. Ltd.

Room 3607, 36/F,
Golden Central Tower,
No. 3037, Jintian Road,
Futian District,
Shenzhen, China 518048
Phone: +86 755 2382 0322
Fax: +86 755 2382 5090

■ E-Mail